


IRONERS

TFI 3516 · 3521

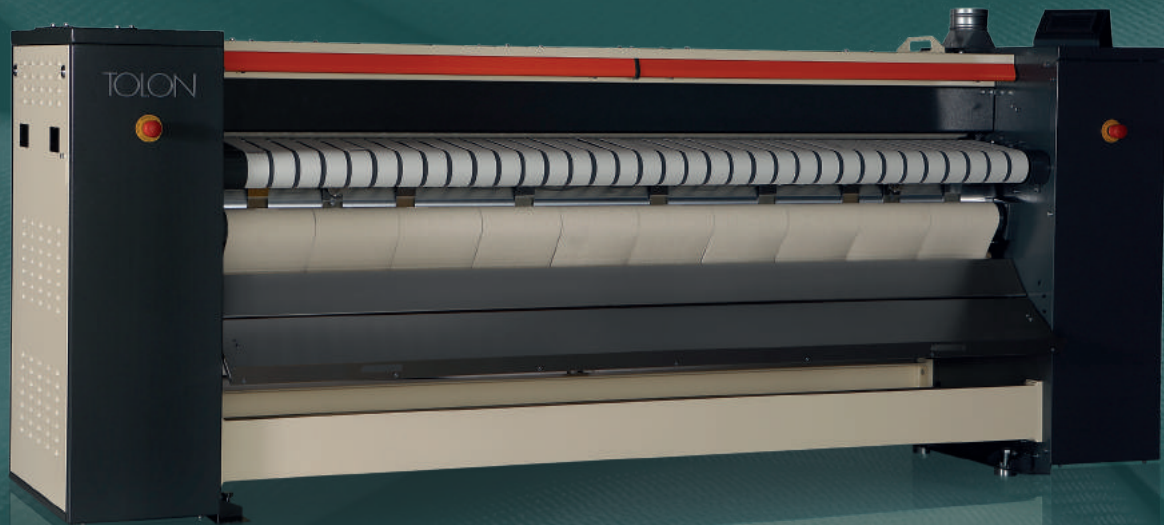

STANDARD FEATURES & BENEFITS

- Ergonomic cylinder heated ironer
- Gas or electric heating
- Extended heat transfer path
- Large surface contact with linen
- Roll standard with chrome surface coating for better thermal conduction and highly resistant to corrosion, even after periods of inactivity
- Finger protection panel and emergency button for more safety
- Easy to use electronic control with pre-set ironing programmes
- Indication of ironing temperature and speed
- Frequency controlled motor
- Reverse mode possible
- Space-saving wall model with front return of the linen
- Overheating check system with 2 temperature sensors
- Premix burner for more power and efficient ironing
- LED lights on the ironing width for good visibility and operation

TOLON

IRONERS

TFI 3516 · 3521

MODEL	UNIT	TFI 3516	TFI 3521
CAPACITY			
Roll diameter	mm	350	350
Working width	mm	1640	2100
Roll speed	m/min	2-6	2-6
Performance (* gas heated)	kg/h	68	85
ELECTRIC HEATING			
Electric heating power **	kW	24	30
Evaporation	l/h	18	25
Electric consumption	kW/h	24	30
GAS HEATING			
Gas heating power	kW	28	37
	Btu	95539	126249
Evaporation	l/h	26	34
Gas connection Ø	DN-BSP	20 (¾")	20 (¾")
Gas pressure	mbar	20-50	20-50
Gas consumption	kW/h	31	35
	Btu/h	104154	118520
Electric consumption	kW/h	1,5	1,5
VOLTAGE/ELECTRIC CONNECTION OPTIONS			
Electric			380 - 415V 3 ph + N 50Hz 380 - 415V 3 ph + N 60Hz 440 - 480V 3 ph 50Hz 440 - 480V 3 ph 60Hz
Gas			380 - 415V 3 ph + N 50Hz 380 - 415V 3 ph + N 60Hz 440 - 480V 3 ph 50Hz 440 - 480V 3 ph 60Hz 200 - 240V 3 ph 50Hz 200 - 240V 3 ph 60Hz 200 - 240V 1 ph 50/60Hz
MOTORS			
Roll motor	kW	0,37	0,37
Fan motor	kW	0,75	0,75
EXHAUST			
Exhaust connection Ø	mm	110	110
Airflow	Electric	m³/h	450
	Gas	m³/h	450
DIMENSIONS (WxDxH)			
Standard	Electric	mm	2554 x 759 x 1251
	Gas	mm	2554 x 775 x 1251
Packing	Electric	mm	2640 x 900 x 1391
	Gas	mm	2640 x 900 x 1391
WEIGHT			
Net	Electric	kg	725
	Gas	kg	650
Gross	Electric	kg	765
	Gas	kg	690
SOUND LEVEL			
		db(A)	< 60

* Sheets 160 x 200 cm - 125 g/m²

** Output calculated at 380V/IIIphase

TOLON reserves the right to make changes to the machines and the specifications in this datasheet at any time, without prior notice. Details and photographs are only for informational purposes and are never binding.

www.hiwash.com.mx

TOLON